


SOC data sheet SOC-1040-2-x, $\lambda = 1040 \text{ nm}$

Laser wavelength	$\lambda = 1040 \text{ nm}$
Transmittance	$T = 3 \%$
Absorptance	$A_0 = 2 \%$
Modulation depth	$\Delta R = 1.2 \%$
Non-saturable loss	$A_{ns} = 0.8 \%$
Saturation fluence	$\Phi_{sat} = 90 \mu\text{J}/\text{cm}^2$
Relaxation time constant	$\tau \leq 10 \text{ ps}$
Chip area	5mm x 5mm; other dimensions on request
Chip thickness	625 μm ; semi-insulating GaAs
Front side protection	with a dielectric layer
Back side AR coating	the SOC back side is polished and antireflection coated for 1064 nm
Mounting of SOC-1040-2-x	denotes the type of mounting as follows:
$x = 0$	unmounted
$x = 12.7$	glued on a gilded Cu-cylinder with 12.7 mm \varnothing and 4 mm \varnothing center hole
$x = 25.4$	glued on a gilded Cu-cylinder with 25.4 mm \varnothing and 4 mm \varnothing center hole
$x = \text{FC}$	mounted on a 1 m monomode fiber cable with FC connector

Spectral low intensity reflectance

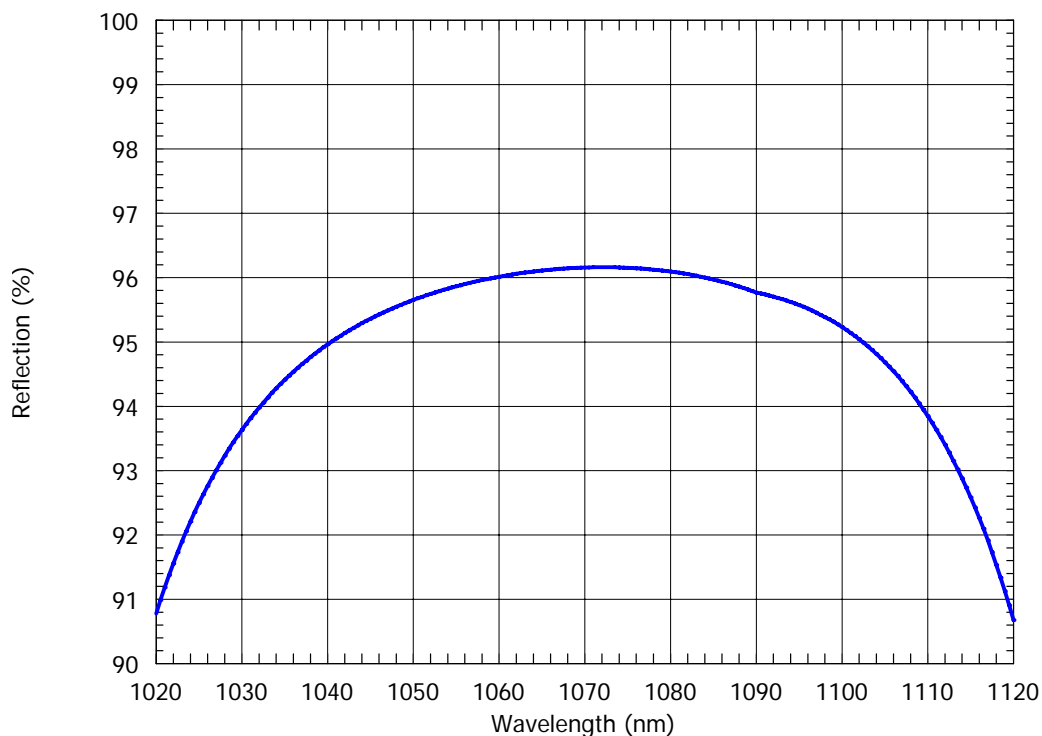

SOC 402-III


BATOP GmbH
Wildenbruchstraße 15
D-07745 Jena
Germany

Tel: +49 3641 634009 - 0
Fax: +49 3641 634009 - 20
E-mail: info@batop.de

Deutsche Bank Jena
Bank Code: 82070024
Account No: 3922655
IBAN: DE49 8207 0024 0392 2655 00

VAT Reg. No: DE 813698804
Tax Acc. No: 161/106/02514
Local Court Jena HRB 112769

Spectral low intensity transmittance

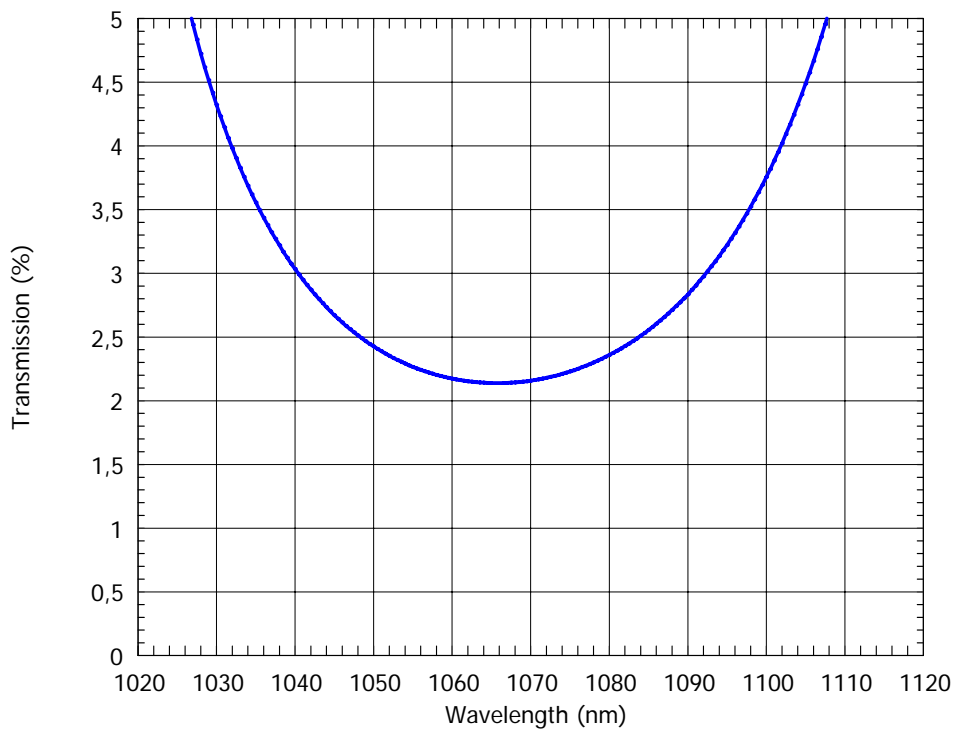

Spectral low intensity absorbance

